


PROFIL PODŁUŻNY DW_449
WRAZ Z ZARUROWANIEM ROWU PRAWEGO



POZIOM ODNIESIENIA 226.00																																															
Rzędne niwelety	229.53		229.86		230.19 230.19		230.50		230.65		230.84		231.16 231.19		231.51		231.64		231.85		232.22 232.22		232.54		232.86		233.18		233.50 233.51		233.84		234.18		234.30		234.50		234.81 234.81		235.13		235.33		235.43		235.72 235.75
Rzędne istniejące			229.86		230.19		230.50		230.84		231.19		231.51		231.85		232.22		232.54		232.86		233.18		233.50		233.83		234.17		234.50		234.81		235.13		235.43		235.72		235.75						
Różnice rzędnych	0.00		0.00		0.00 0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		0.00		
Elementy niwelety	<div><div>L=20.00m i=3.31%</div><div>L=14.66m i=3.15%</div><div>L=14.57m i=3.53%</div><div>L=14.95m i=3.18%</div><div>L=15.82m i=3.68%</div><div>L=40.11m i=3.21%</div><div>L=23.63m i=3.37%</div><div>L=16.26m i=3.09%</div><div>L=16.39m i=3.21%</div><div>L=14.75m i=2.83%</div></div>																																														
Elementy trasy	PROSTA L=191.14m																																														
Odległości	00.00		10.00		20.00 20.00		30.00		34.66		40.00		49.23 50.00		60.00		64.18		70.00		80.00 80.00		90.00		00.00		10.00		20.00 20.11		30.00		40.00		43.74		50.00		60.00 60.00		70.00		76.39		80.00		90.00 91.14
Kilometraż	● 16+800															● 16+900											● 16+991																				

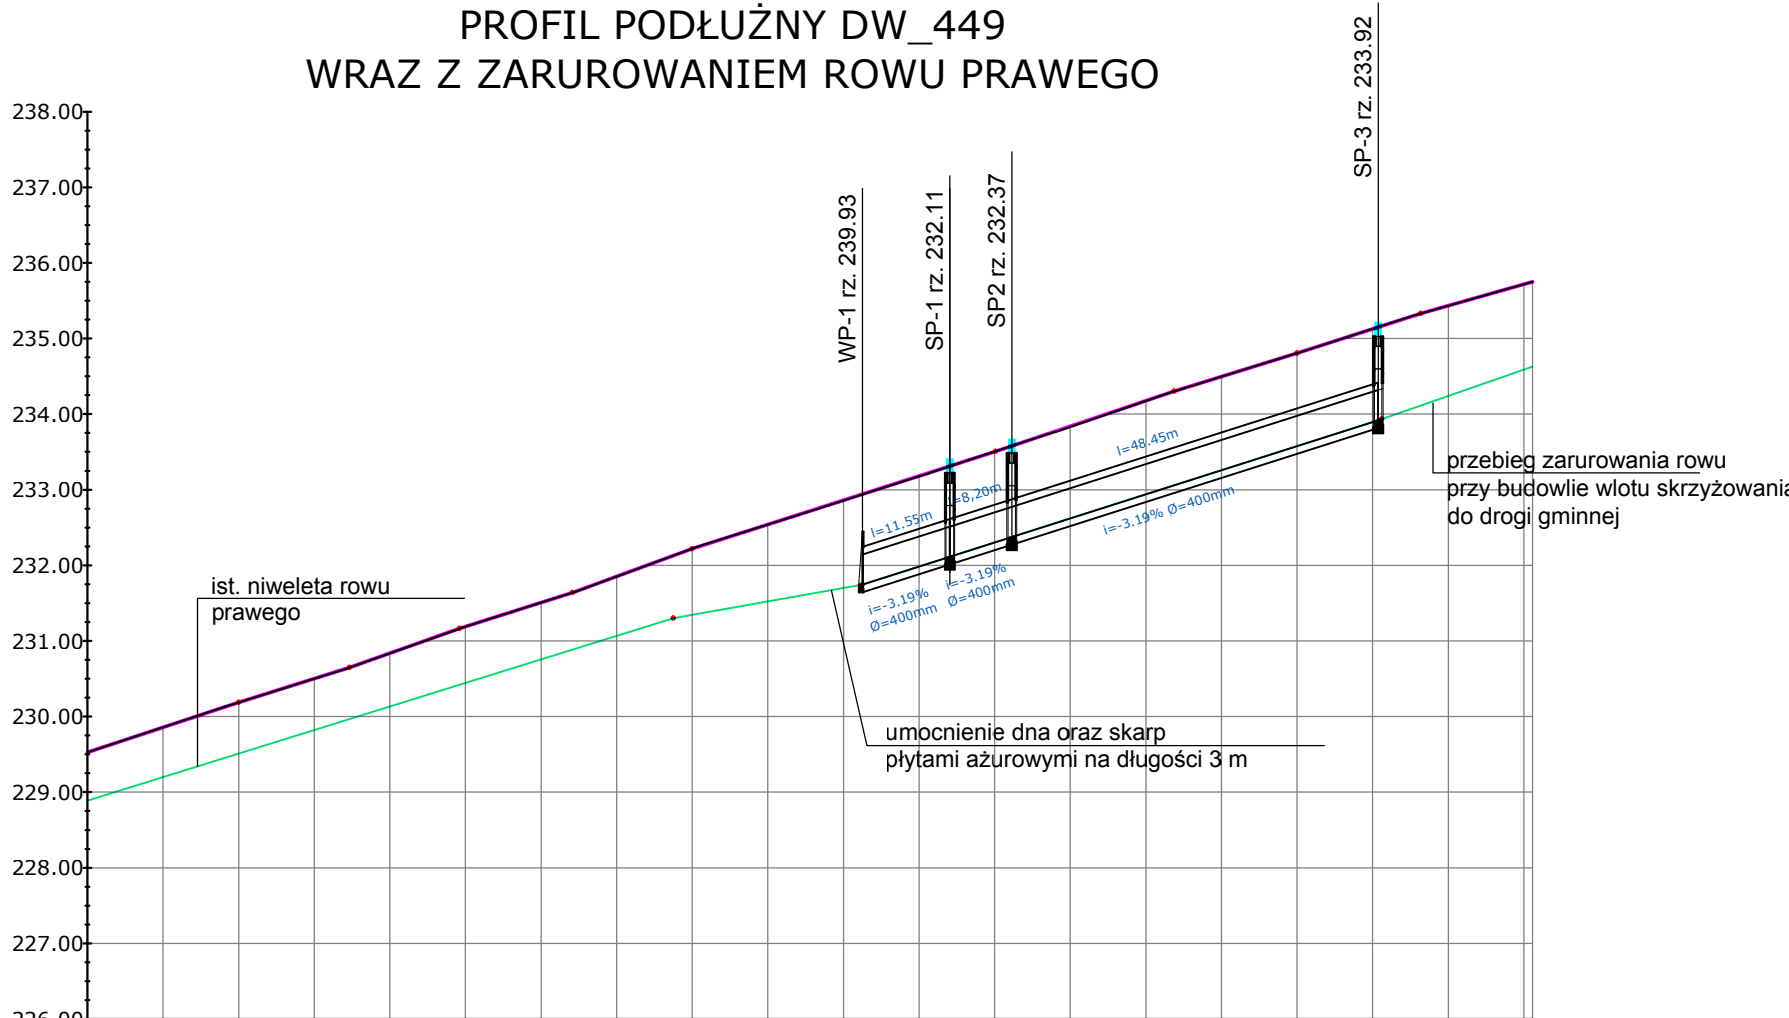